

# 3.65 Koppeling

## Productinformatie

### Eigenschappen

- Binnengasdraad
- RVS Versterkingsring

### Materiaal

- PVC-U = Polyvinylchloride zonder weekmaker

### Afdichting

- EPDM

### Vervaardiging


- Spuitgiet



## Onderdelen



8.25 Inlegstuk spgk.    8.22 Draadeind spgk.    8.23 Draadeind spgk.    8.24 Draadeind spgk.    8.20 Wartelmoer

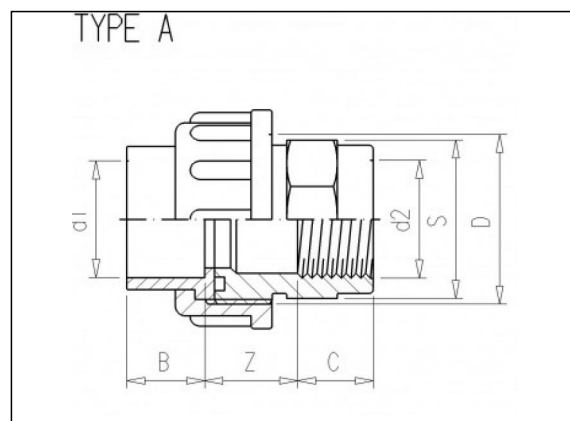

## Beschikbare artikelen

ART.CODE	d1	d2	Z	B	C	D	S	Type	PN	Verp
3.65.010	10	1/4" (F)	22	12	12	5/8"	23	A	16	100
3.65.012	12	1/4" (F)	22	12	12	5/8"	23	A	16	100
3.65.016	16	3/8" (F)	25	14	12	3/4"	25	A	10	100
3.65.017	16	3/8" (F)	25	14	12	3/4"	25	B	16	100
3.65.020	20	1/2" (F)	25	16	16	1"	30	A	10	100

### Van de Lande BV

Lissenveld 1 \ 4941 VK Raamsdonksveer \ The Netherlands \ t +31 (0)162 51 60 00 \ f +31 (0)162 52 14 17 \ sales@vandelande.com  
 Traderegister Tilburg: 18070844 \ IBAN: NL13 RABO 0143 0035 26 \ BIC: RABONL2U \ VAT: NL 8123.91.755.B01

ART.CODE	d1	d2	Z	B	C	D	S	Type	PN	Verp
3.65.021	20	1/2" (F)	25	16	16	1"	30	B	16	100
3.65.025	25	3/4" (F)	25	19	17	1 1/4"	36	A	10	60
3.65.026	25	3/4" (F)	25	19	17	1 1/4"	36	B	16	60
3.65.032	32	1" (F)	25	22	21	1 1/2"	44	A	10	100
3.65.033	32	1" (F)	25	22	21	1 1/2"	44	B	16	100
3.65.040	40	1 1/4" (F)	26	26	23	2"	54	A	10	80
3.65.041	40	1 1/4" (F)	26	26	23	2"	54	B	16	80
3.65.050	50	1 1/2" (F)	31	31	23	2 1/4" "	64	A	10	60
3.65.051	50	1 1/2" (F)	31	31	23	2 1/4"	64	B	16	60
3.65.063	63	2" (F)	31	38	27	2 3/4"	80	A	10	45
3.65.064	63	2" (F)	31	38	27	2 3/4"	80	B	16	45
3.65.075	75	2 1/2 (F)	41	44	30	ZGTD	94	B	10	10
3.65.090	90	3" (F)	51	51	34	ZGTD	114	B	10	10
3.65.110	110	4" (F)	55	61	41	ZGTD	138	B	10	10

**Van de Lande BV**

Lissenveld 1 \ 4941 VK Raamsdonksveer \ The Netherlands \ t +31 (0)162 51 60 00 \ f +31 (0)162 52 14 17 \ sales@vandelande.com  
 Traderegister Tilburg: 18070844 \ IBAN: NL13 RABO 0143 0035 26 \ BIC: RABONL2U \ VAT: NL 8123.91.755.B01

[www.vandelande.com](http://www.vandelande.com)

All our transactions are subject to the Van de Lande General Terms of Sale. A copy of these can be provided immediately upon your request.